

SPT-P1RV3-L20D

3Gbps Video SFP Optical Receiver, PIN photodetector

Features

- HD-SDI SFP Receiver available
- SD-SDI SFP Receiver available
- 3G-SDI SFP Receiver available
- SMPTE 297-2006 Compatible
- Metal enclosure for Lower EMI
- PIN photodetector
- Supports video pathological patterns for SD-SDI, HD-SDI and 3G-SDI
- SFP Non-MSA Pin out
- Digital Diagnostic functions available through the I2C interface
- Compatible with RoHS
- +3.3V single power supply
- Operating case temperature range: 0 to +70°C
- RoHS 2.0 compliant (lead free)

Application

- SMPTE 297-2006 Compatible Electrical-to-Optical Interfaces
- HDTV/SDTV Service Interfaces

Description

The video series transceivers are high performance, cost effective modules for duplex video transmission application over single mode fiber.

The receiver is designed to receive data rates from 50Mbps to 2.97Gbps and is specifically designed for robust performance in the presence of SDI pathological patterns for SMPTE 259M, SMPTE 344M, SMPTE 292M and SMPTE 424M serial rates. The module is fully compliant with SMPTE 297M-2006.

The receiver is consists of a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCUcontrol unit. All modules satisfy class I laser safety requirements.

The receivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

Technical Parameters

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V _{cc}	-0.5	4.5	V
Storage Temperature	T _s	-40	+85	°C
Operating Humidity	Rh	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	ypical	Max	Unit
Operating Case Temperature	T _c	0		70	°C
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V
Power Supply Current	I _{cc}			150	mA
Data Rate			3		Gbps

Optical and Electrical Characteristics

Parameter		Symbol	Min	Typical	Max	Unit	Notes
Receiver							
Rise/Fall Time (20%~80%)		SD-SDI	tr/tf		270	ps	1
		HD-SDI			270	ps	
		3G-SDI			270	ps	
Total Output Jitter	PRBS and colour bar	SD-SDI		70	200	ps	
		HD-SDI		50	130		
		3G-SDI		70	100		
	pathological	SD-SDI		200	300		
		HD-SDI		115			
		3G-SDI		120			
Centre Wavelength		λ _c	1260		1580	nm	
Receiver Sensitivity (PRBS)		SD-SDI			-22	dBm	
		HD-SDI			-22	dBm	
		3G-SDI			-22	dBm	
Receiver Sensitivity (Pathological)		SD-SDI			-16	dBm	
		HD-SDI			-16	dBm	
		3G-SDI			-15	dBm	

Receiver Overload		0			dBm	3
LOS De-Assert	LOS _D			-22		
LOS Assert	LOS _A	-29				
LOS Hysteresis		1		4	dB	
Data Output Swing Differential	V _{out}	650	800	1000	mV	2
LOS	High	2.0		V _{cc}	V	
	Low			0.8	V	

Note:

1. Rise and fall times, 20% to 80%, are measured following a fourth-order Bessel-Thompson filter with a bandwidth of 0.75 x clock frequency corresponding to the serial data rate.
2. PECL input, internally AC-coupled and terminated.
3. Internally AC-coupled.

Timing and Electrical

Parameter	Symbol	Mi	Ma	Uni
LOS Assert Time	t _{loss_on}		100	μs
LOS De-assert Time	t _{loss_off}		100	μs
Serial ID Clock Rate	f _{serial_clock}		280	KHz
MOD_DEF (0:2)-High	V _H	2	V _{cc}	V
MOD_DEF (0:2)-Low	V _L		0.8	V

Diagnostics Specification

Parameter	Range	Uni	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
RX Power	-20 to -6	dBm	±3dB	Internal / External

I2C Bus Interface

The I2C bus interface uses the 2-wire serial CMOS E2PROM protocol. The serial interface meets the following specifications:

1. Support a maximum clock rate of 280Khz.
2. Input/Output levels comply with LVCMOS/LVTTL or compatible logics. Low: 0- 0.8 V


High: 2.0-3.3V

Undefined: 0.8-2.0V


Pin Description(Non-MSA)

Pin Diagram

Top of Board

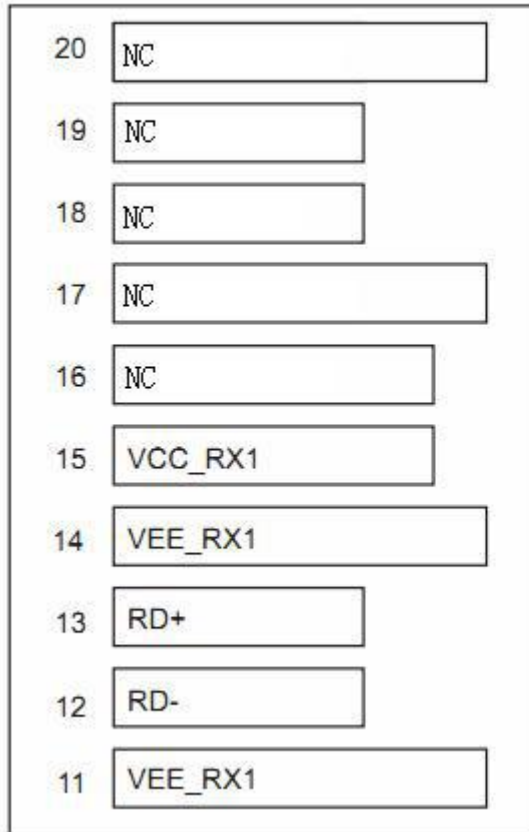

Bottom of Board
(as viewed through top of board)

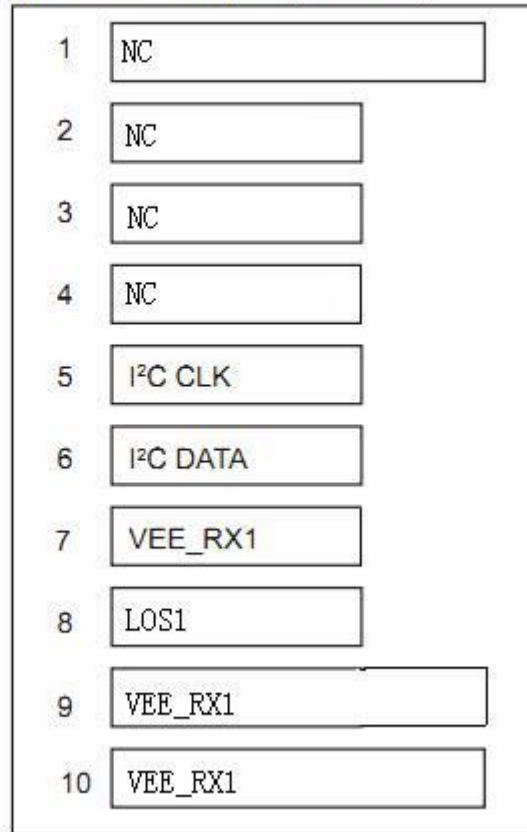

Pin Descriptions

Pin	Symbol	Name/Description	Plug Seq.	Notes
1	NC	Not Connected	1	
2	NC	Not Connected	3	
3	NC	Not Connected	3	
4	NC	Not Connected	3	
5	I2C CLK	SCL Serial Clock Signal	3	Note 1
6	I2C DATA	SDA Serial Data Signal	3	Note 1
7	VEE_RX1	Receiver1 Ground	3	
8	LOS1	Loss of	3	Note 2
9	VEE_RX1	Receiver1 Ground	1	
10	VEE_RX1	Receiver1 ground	1	
11	VEE_RX1	Receiver1 ground	1	
12	RD-	Inv. Received Data Out	3	Note 3
13	RD+	Received Data Out	3	Note 3
14	VEE_RX1	Receiver1 ground	1	
15	VCC_RX1	Receiver1 Power Supply	2	
16	NC	Not Connected	2	
17	NC	Not Connected	1	
18	NC	Loss of	3	

19	NC	Not Connected	3	
20	NC	Not Connected	1	

Note:

Plug Seq.: Pin engagement sequence during hot plugging.

1) These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board.

The pull-up voltage shall be VccR.

I2C CLK is the clock line of two wire serial interface for serial ID

I2C DATA is the data line of two wire serial interface for serial ID

2) LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and Vcc+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.

3) RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.

Serial ID Field Memory Map

The module serial Id and calibration information is stored in the E2PROM of the SFP supervising device using the address map.

Byte Addr	Bit Size	Name	Description	Value (hex)
0	1	Identifier	Type of transceiver	82
1	1	Ext. Identifier	Extended identifier of type of transceiver	04
2	1	Connector	Code for connector type	07
3	1	Standards Compliance	For SMPTE259M/344M/292M/424M and SMPTE 297M	41
4	7	Transceiver	Code for electronic or optical compatibility, Not applicable.	
5				
6				
7				
8				
9				
10				
11	1	Encoding	Code for serial encoding algorithm	30
12	1	BR, Nominal	Nominal signalling rate, units of 100MBd.	1E
13	1	Rate Identifier	Type of rate select functionality, Not applicable	
14	1	Length(SMF,km)	Link length supported for single mode fiber, units of km	14
15	1	Length (SMF)	Link length supported for single mode fiber, units of 100 m	00
16	1	Length (50um)	Link length supported for 50 um OM2 fiber, units of 10 m	00
17	1	Length (62.5um)	Link length supported for 62.5 um OM1 fiber, units of 10 m	00


18	1	Length (cable)	Link length supported for copper or direct attach cable, units of m	00
19	1	Length (OM3)	Link length supported for 50 um OM3 fiber, units of 10 m	00
20	16	Vendor name	SFP vendor name (ASCII)	X
21				X
22				X
23				X
24				X
25				X
26				X
27				X
28				X
29				X
30				X
31				X
32				X
33				X
34				X
35				X
36	1	Reserved	Reserved	00
37	3	Vendor OUI	SFP vendor IEEE company ID	00
38				00
39				00
40	16	Vendor PN	Part number provided by SFP vendor (ASCII)	X
41				X
42				X
43				X
44				X
45				X
46				X
47				X
48				X
49				X
50				X
51				X
52				X
53				X
54				X
55				
56	4	Vendor rev	Revision level for part number provided by vendor (ASCII)	X
57				
58				
59				
60	2	Wavelength	Laser wavelength (Passive/Active Cable Specification Compliance)	
61				
62	1	Unallocated		



63	1	CC_BASE	Check code for Base ID Fields	
64	2	Options	Indicates which optional transceiver signals are implemented	
65				
66	1	BR, max	Upper bit rate margin, units of %	05
67	1	BR, min	Lower bit rate margin, units of %	5F
68	16	Vendor SN	Serial number provided by vendor (ASCII)	X
69				X
70				X
71				X
72				X
73				X
74				X
75				X
76				X
77				X
78				X
79				X
80				X
81				X
82				X
83				X
84	8	Date code	Vendor's manufacturing date code	
85				
86				
87				
88				
89				
90				
91				
92	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented(if any) in the transceiver	28
93	1	Enhanced Options	Indicates which optional enhanced features are implemented(if any) in the transceiver	90
94	1	SFF-8472Compliance	Indicates which revision of SFF-8472 the transceiver complies with.	X
95	1	CC_EXT	Check code for the Extended ID Fields	
96	32	Vendor Specific	Vendor Specific EEPROM	0
97				0
98				0
99				0
100				0
101				0
102				0
103				0
104				0
105				0

106			0
107			0
108			0
109			0
110			0
111			0
112			0
113			0
114			0
115			0
116			0
117			0
118			0
119			0
120			0
121			0
122			0
123			0
124			0
125			0
126			0
127			0

Mechanical Dimensions

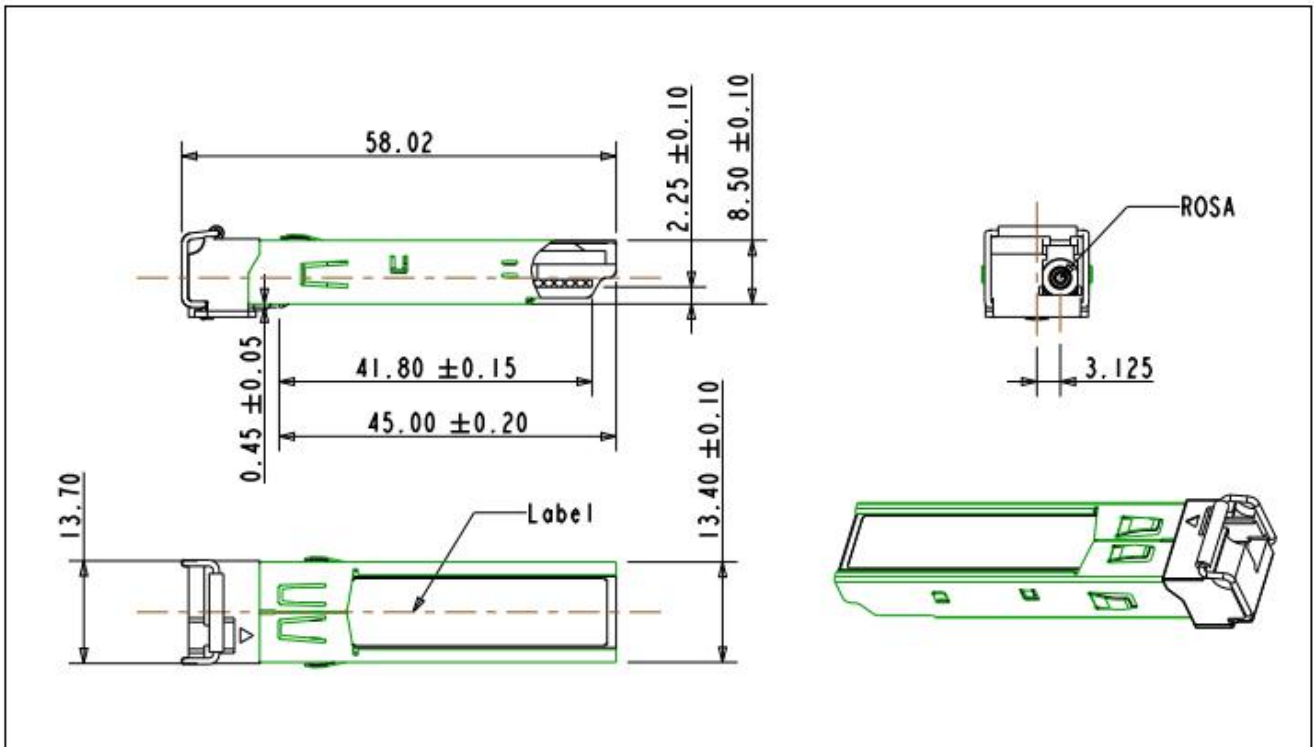

Regulatory Compliance

SPT-P1RV3-L20D 3G VIDEO transceivers are Class 1 Laser Products. They are certified per the following standards:

Feature	Agency	Standard
Laser Eye Safety	FDA/CDRH	CDRH 21 CFR 1040 and Laser Notice 50
Laser Eye Safety	TÜV	IEC 60825-1:2014 EN 60825-1:2014 EN 60825-2:2004+A1+A2
Electrical Safety	TÜV	EN 60950-1:2006+A11+A1+A12+A2
Electrical Safety	UL/CSA	UL 60950-1 & CAN/CSA C22.2 No.60950-1 CLASS 3862.07 CLASS 3862.87
EMC	FCC	47 CFR FCC Part 15 Subpart B
EMC	CE-EMC	EN 55032:2015 EN 55024:2010+A1:2015 EN 61000-3-2:2014 EN 61000-3-3:2013

Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

References

1. SMPTE 297-2006 Compatible Electrical-to-Optical Interfaces
2. HDTV/SDTV Service Interfaces.
3. Directive 2011/65/EU of the European Parliament and of the Council, “on the restriction of the use of certain hazardous substances in electrical and electronic equipment,” July 1, 2011.



CAUTION:

Use of controls or adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure

Ordering Information

Part Number	Product Description	Note
SPT-P1RV3-L20D	Transceiver SFP Single RX Video 3G SDI 20km LC Interface with DDM Commercial Temperature	Non-MSA TYPE

Note:

- 1、 Default operating case temperature is 0 ~ 70℃. If you need -40 ~85℃ products, add “T” after Part Number .
- 2、 If you need more customized services, please contact us.

E-mail: info@sopto.com.cn

Web : <http://www.sopto.com.cn>